


SF15 DMX Pixel Chasing RGBW Silicone LED Linear Flex

SF15-24V-5050-56-DMX4-RGBW

Specification

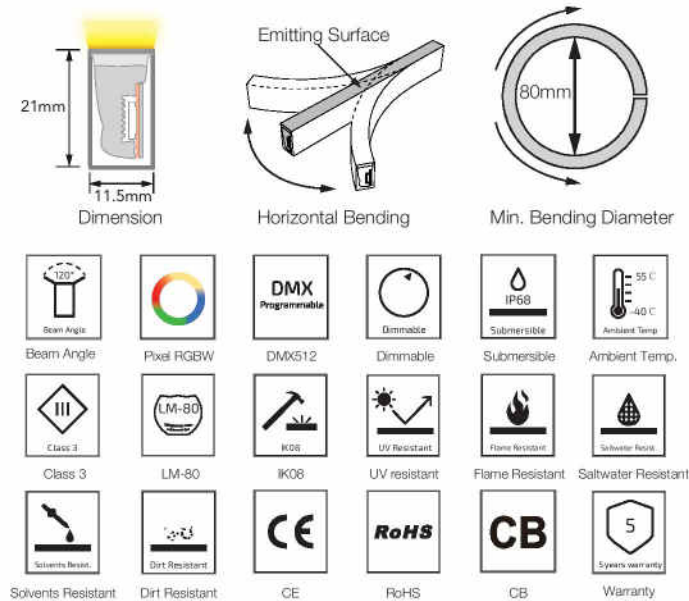


Technical Parameters

Electrical	
Input Voltage	24V DC
Power Consumption	15W/m
Physical	
LED Count	56 LEDs/m
Cutting Unit	7 LEDs
Cutting Unit Length	125mm
Minimum Bend Diameter	80mm
Output	
LED Light	Epistar SMD LED 5050
Color	RGBW (2700K/3000K/4000K/5000K)
Working Mode	DMX (RS485)
Pixels Quantity	8 Pixels/m
IC Chips	UCS512
Max Run Length*	
Single Feed	8 M
Double Feed	16 M
Beam Angle	120°
Lumen Maintenance	70,000 Hours L70 @ 25°C 50,000 Hours L70 @ 50°C

Emitting Color		Lumen Output
	Red	25lm/m
	Green	78lm/m
	Blue	15lm/m
	RGBW	199lm/m
	4000K	88lm/m

Temperature Ranges	
Installation	0°C to 50°C
Operating	-40°C to 55°C
Dependability	
Warranty	5 Years Warranty
IP Rating	IP68 Wet location submersible <2m

Illuminance Distribution

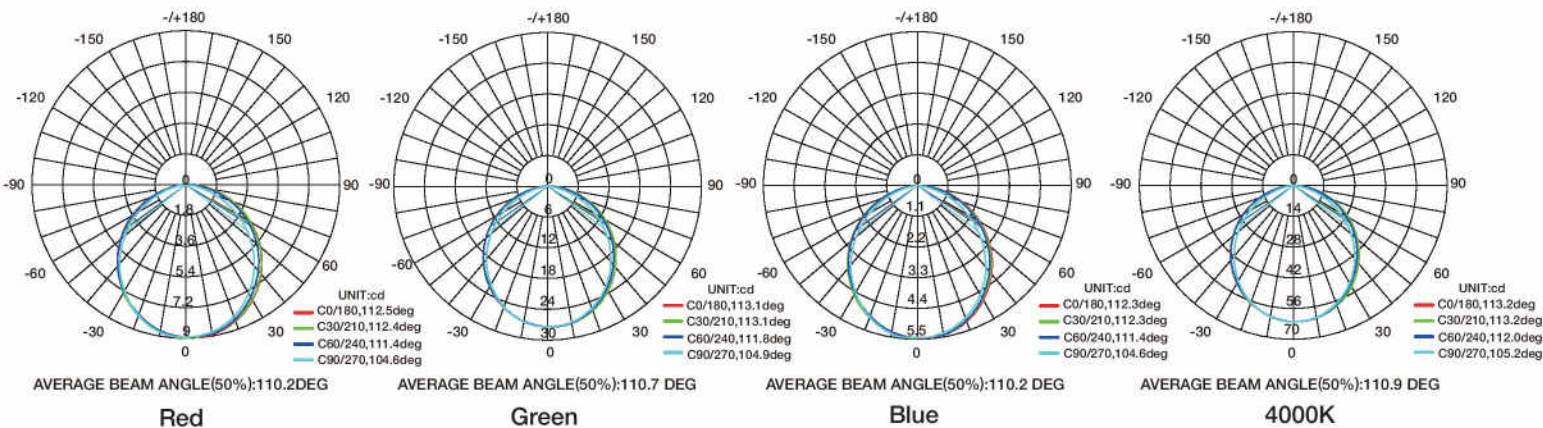

SF15 DMX Pixel Chasing RGBW Silicone LED Linear Flex

Connection

